


# P48272V50I\_T30

5.0 Inches, 480xRGBx272, 65K Colors, UNICView LCM

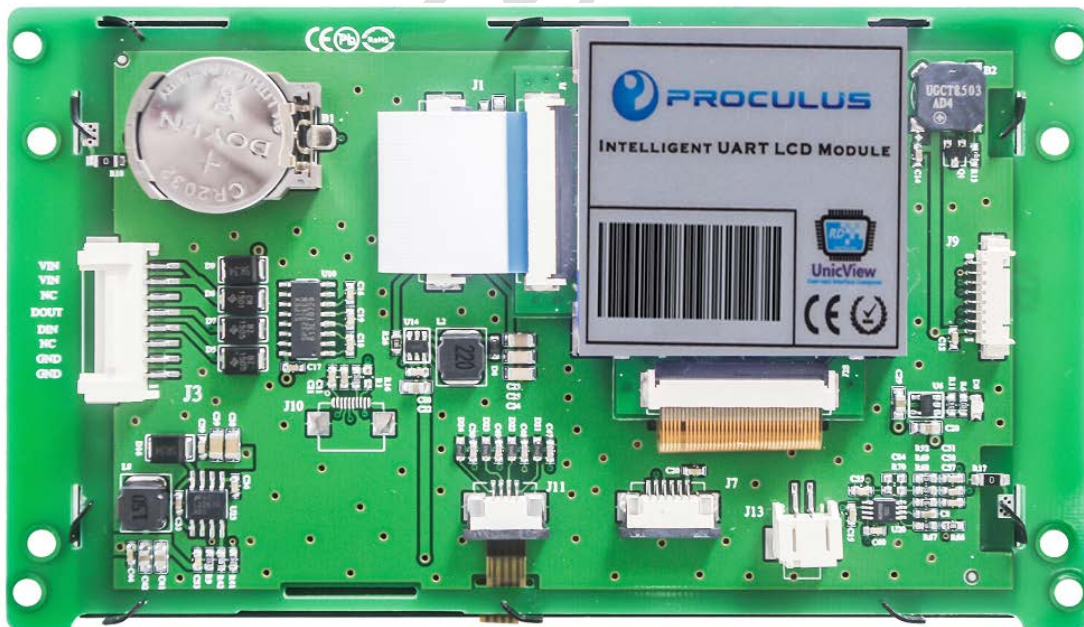

● Display

Item	Parameter	Description
Color	65K (65536) colors	16 bit color 5R6G5B
Visual Angle L/R/U/D	70° /70° /50° /70°	
Resolution	480*272	90° rotated display (272*480)
Backlight /Lifecycle/Brightness	LED/20,000 HOURS/ 500 cd/m <sup>2</sup>	
Working Temperature	-20~+70°C/-30~+80°C	64 levels adjustment
Static ESD	±12KV	

● Voltage & Current

Item	Conditions	Min	Typ	Max	Unit
Power Voltage	-	6	12	40	V
Operation Current	VIN = 12V, Backlight on	-	190	-	mA
	VIN = 24V, Backlight on	-	100	-	mA
	VIN = 12V, Backlight off	-	60	-	mA



● Interface

Item	Conditions	Min	Typ	Max	Unit
Baudrate	Standard	1200	115200	892900	bps
Interface	RS232C				
Data Format	1 byte for initial, 8 bytes for data, invalid bytes for checksum, 1 byte for end				
Socket	SMD2.0-8P with lock catch				

● Peripherals

No.	Parameter	Description
1	Touch Screen	4-wire resistance touch screen: P48272V50I_T30
		4-wire capacitive touch screen: P48272V50I_P30
		No touch screen: P48272V50I_N30
2	Buzzer	YES
3	RTC	YES
4	USB	YES. For downloading offline or user data copy.
5	USB Mini	YES. For online debugging.
6	Audio	Support *.MP3 files. Theoretically 4096 file in maximum. Speaker power: 4 Ω 2W or 8 Ω 2W.
7	Keyboard	Support external row keyboard.
8	Memory	128M(support *.jpg files, maximum 65536 files theoretically)



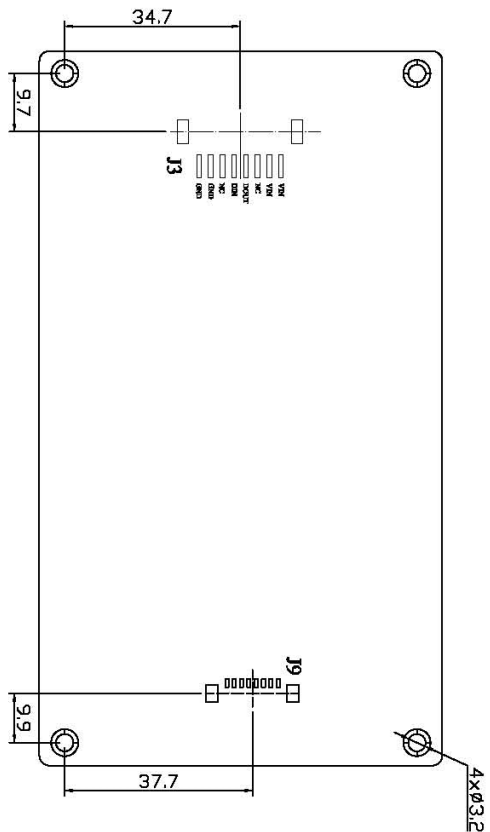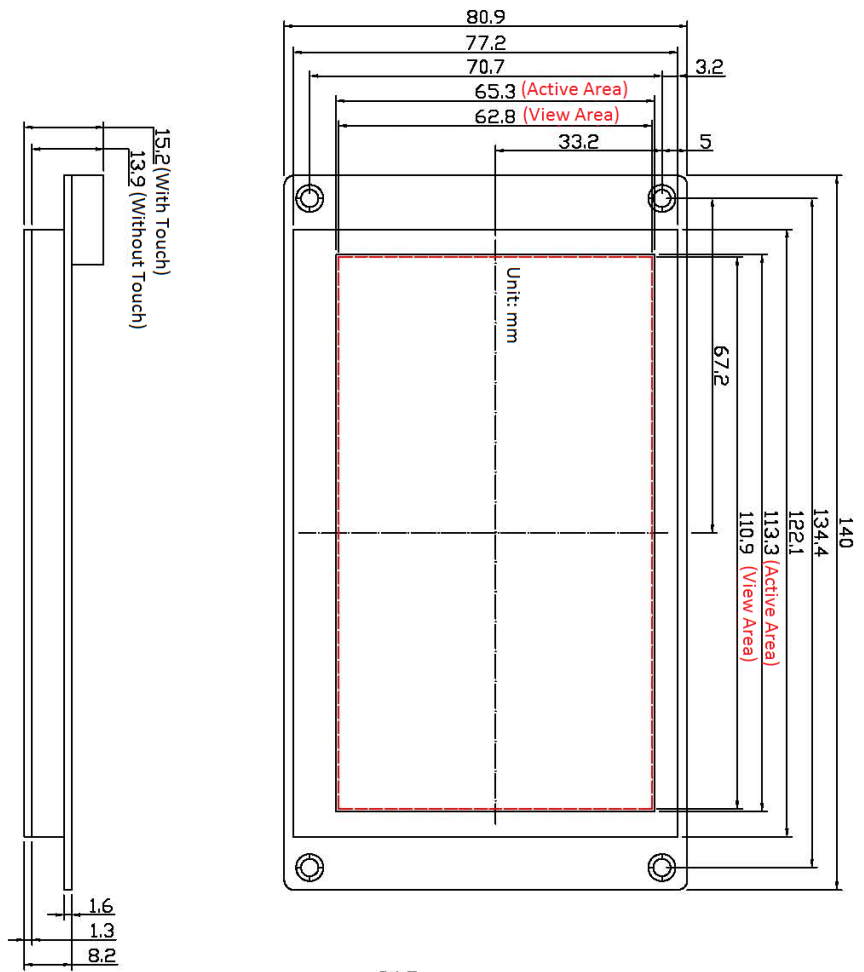

Pin Name	J3 Pin Num.	Remarks
VIN	7,8	POWER INPUT
GND	1,2	GND
DIN	4	DIN
DOUT	5	DOUT
NC	3,6	Not Defined

<b>Part No.</b>	P48272V501_T30			 PROCLUS TECHNOLOGIES INC.
<b>Datasheet</b>	A4	<b>Drawn by</b>	Proculus	
<b>Proportion</b>	1:1	<b>Verified by</b>		
<b>Unit</b>	mm	<b>Confirmed by</b>		
		<b>Date</b>		