


# P80480V50C\_T17

5.0 Inches, 800xRGBx480, 65K Colors, UNICView LCM

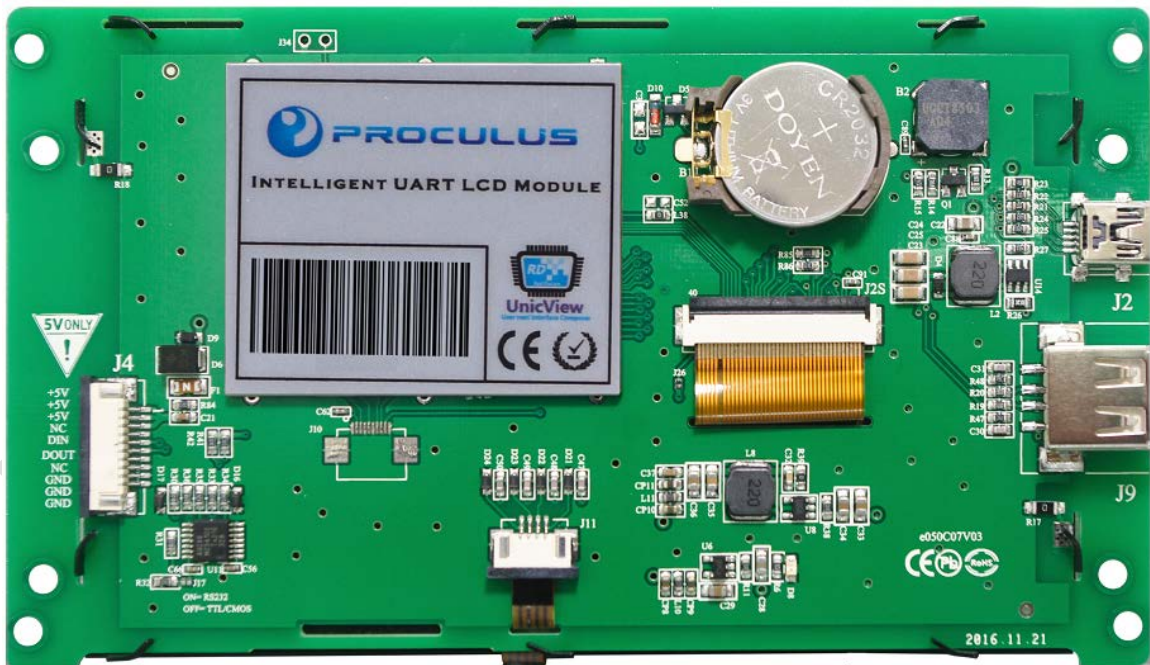

## ● Display

Item	Parameter	Description
Color	65K (65536) colors	16 bit color 5R6G5B
Visual Angle L/R/U/D	70° /70° /50° /70°	
Resolution	800*480	90° rotated display (480*800)
Backlight /Lifecycle/Brightness	LED/20,000 HOURS/ 350 cd/m <sup>2</sup>	
Working Temperature	-20~+70°C/-30~+80°C	64 levels adjustment

## ● Voltage & Current

Item	Conditions	Min	Typ	Max	Unit
Power Voltage	-	3.5	5	6	V
Operation Current	VIN = 5V, Backlight on	-	450	-	mA
	VIN = 5V, Backlight off	-	190	-	mA

## ● Interface

Item	Conditions	Min	Typ	Max	Unit
Baudrate	Standard	1200	115200	892900	bps
Interface	TTL/CMOS				
Data Format	1 byte for initial, 8 bytes for data, invalid bytes for checksum, 1 byte for end				
Socket	SMD1.0-10P with lock catch				

Note: Short-circuit J17 to choose RS232

## ● Peripherals

No.	Parameter	Description
1	Touch Screen	4-wire resistance touch screen: P80480V50C_T17
		4-wire capacitive touch screen: P80480V50C_P17
		No touch screen: P80480V50C_N17
2	Buzzer	YES
3	RTC	YES
4	USB	YES. For downloading offline or user data copy.
5	USB Mini	YES. For online debugging.
6	Memory	128M(support *.jpg files, maximum 65536 files theoretically), extended to 1G at maximum.



