

P10768J150I_T01

15 Inches, 1024xRGBx768, 65K Colors, UnicView LCM



● Display

Item	Parameter	Description
Color	65K (65536) colors	16 bit color 5R6G5B
Resolution	1024*768	90° rotated display (768*1024)
Backlight /Lifecycle/Brightness	LED/20,000 HOURS/ 325 cd/m ²	
Working Temperature	-20~+70°C/-30~+80°C	64 levels adjustment

● Voltage & Current

Item	Conditions	Min	Typ	Max	Unit
Power Voltage	-	-	12	26	V
Operation Current	VIN = 12V, Backlight on	-	950	-	mA
	VIN = 12V, Backlight off	-	180	-	mA
	Recommend Power Input: 12V2A DC				

● Reliability Test

Item	Conditions	Min	Typ.	Max	Unit
Working Temperature	60%RH at 12V voltage	-20	25	70	°C
Storage Temperature	-	-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH
Protective Paint	-	-	None	-	-
Aging Test	-	-	8	-	H

● Interface

Item	Conditions	Min	Typ.	Max	Unit
Baud Rate	Standard	1200	115200	921600	bps
	User define	1200	-	921600	bps
Output Voltage (TXD, BUSY)	Output 1, Iout = 1mA	3.0	3.2	-	V
	Output 0, Iout = -1mA	-	0.1	0.2	V
Input Voltage (RXD, I/O0)	Input 1, Iin = 1mA	2.0	3.3	15.0	V
	Input 0, Iin = -1mA	-15.0	0.0	0.3	V
Interface	Mode is determined by Jumper6: ON = 8N1, 3.3V TTL/CMOS; OFF = 8N1, RS232				
Socket	HY2.0-8P				
USB	None				
SD slot	Yes (SD/SDHC, FAT32 file format)				

● Memory

Item	Parameter	Min	Typ.	Max	Unit
Flash	Space of Font	-	32	-	MB
	Picture Storage (256MB)	-	-	143	Pcs
	Picture Storage (1GB)	-	-	635	Pcs
	User's Storage	0	-	32	MB



● Peripherals

No.	Parameter	Description
1	Touch Screen	4-wire resistance touch screen: P10768J150I_T01
		4-wire capacitive touch screen: P10768J150I_P01
2	Buzzer	YES
3	RTC	YES
4	Audio Play	YES
5	SD Card	YES



Technical Requirements:

1. Unit: mm
2. Unmarked Tolerance: ±0.3mm

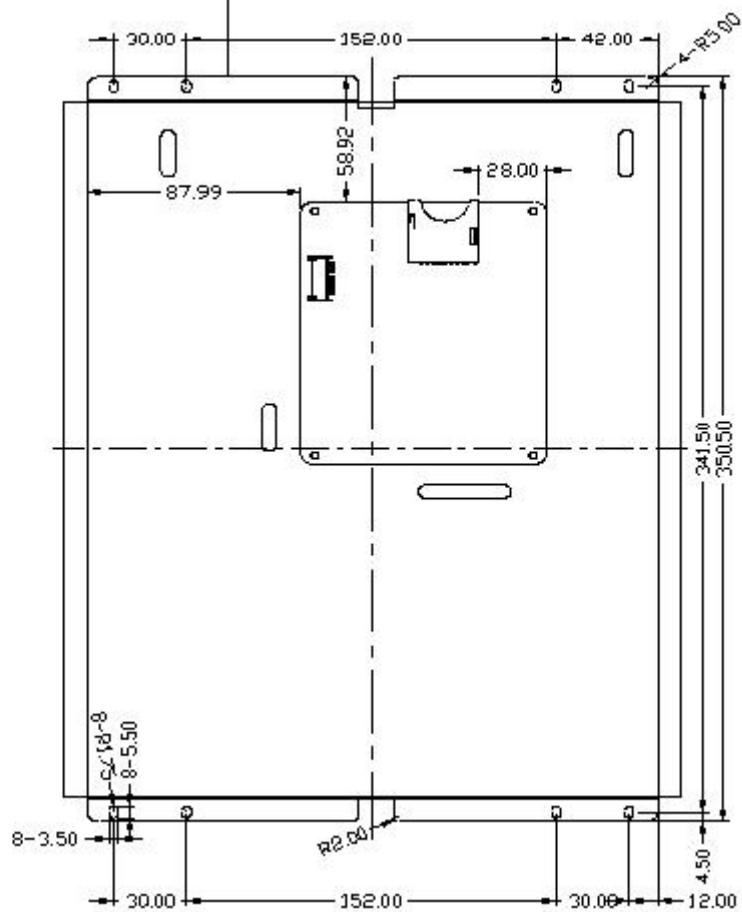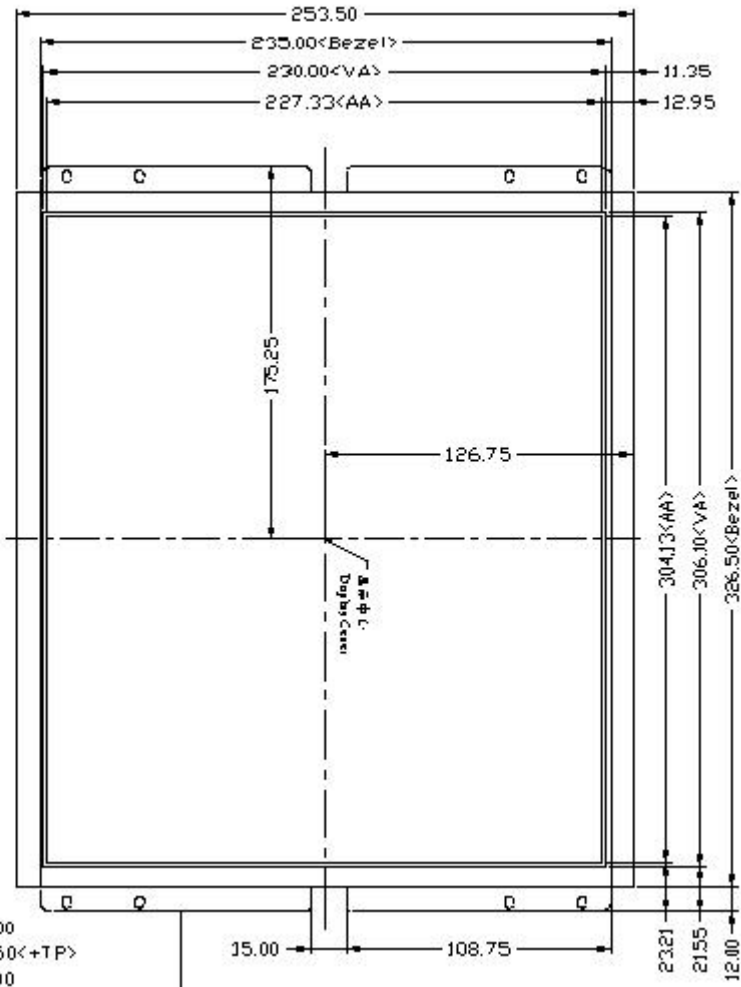

J1 Pin Num.	Pin Name	Pin Type	Remarks
1,2	VIN	P	POWER INPUT
3	BUSY	OUT	Buffer Full Signal
4	DOUT	OUT	RS232/TTL Data Output
5,6	DIN	IN	RS232/TTL Data Input
7,8	GND	P	GND